



URBAR
ingenieros s.a.





Vibrating screens

V serie

- Adaptable to your needs.
- 1 or 2 meshes.
- Installed horizontal, inclined, supported or suspended.
- 3 possibilities for the tray: open, open with fines collector hopper, airtight.
- Driven by an electric external vibrator, Urbar made.

Vibrating screens. V serie.

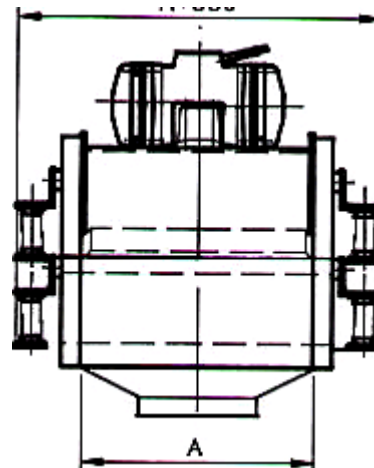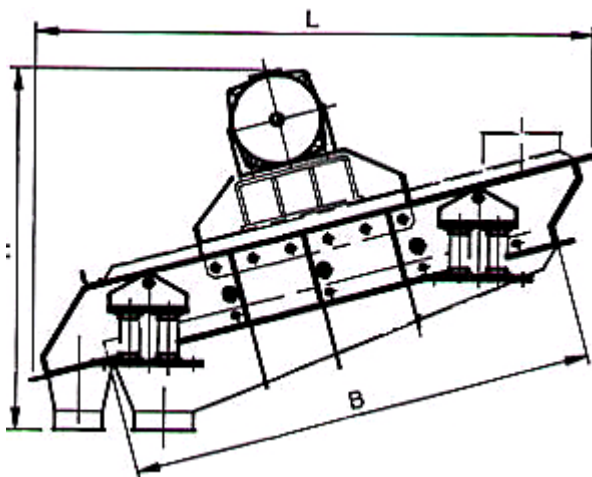

Technical characteristics

Type 1 Mesh	Surf. m ²	A	B	L	H	Peso kg	Type 2 Meshes	Surf. m ²	A	B	L	H	Peso kg
		mm											
VI 60/120	0,72	600	1200	1420	725	200	VII 60/120	0,72	600	1200	1550	800	280
VI 70/180	1,26	700	1800	1970	795	230	VII 70/180	1,26	700	1800	2120	920	350
VIT 60/120	0,72	600	1200	1450	925	240	VII T 60/120	0,72	600	1200	1570	885	350
VIT 70/180	1,26	700	1800	2000	995	340	VII T 70/180	1,26	700	1800	2150	1035	420
VI E 60/120	0,72	600	1200	1450	925	290	VII E 60/120	0,72	600	1200	1570	1060	380
VI E 70/180	1,26	700	1800	2000	995	390	VII E 70/180	1,26	700	1800	2150	1100	510

Standard types are indicated in this table, nevertheless, modifications can be made following the requirements:

- The vibrators can be installed in the screen upside down.
- The screens can be installed supported or suspended.
- The outlets and inlets can be made in any shape: square, round or ellipse.
- General dimensions can be modified.

V serie screens, made with one or two meshes, are driven by one electric external vibrator, REX-21 or REX-51, depending on the dimensions, frequency and acceleration requested for each particular case.

The airtight screens are generally equipped with an inspection opening, and an intake dust captation, following the requirements.

The screens are equipped with different meshes (stainless steel, poliurethane, ondulated, non blinding...) depending the product to be handled.



URBAR
ingenieros s.a.

Ctra. Villabona-Asteasu, km 3
Apartado 247
Tel. (+34) 943 691 500
Fax (+34) 943 692 667
E-20159 **Asteasu**

www.urbar.com
E-mail: urbar@urbar.com